

AW-4600CP

Series



The integrated weigh/wrap/label system



AW-4600CP Auto
(Twin Labeller Type)



***All packed in
a compact body!***

AW-4600CP

Series

The integrated weigh/wrap/label system

- Max. 30 packs/min. for weighing/wrapping/labelling operations
- Small footprint-only approx. 1m² needed
- Large color touch screen
- Versatile label designing capability
- Easy cleaning with removable elevator head

Reliable labelling with automatic label applicator (AW-4600CP Auto)



Simple label and film loading



Specifications

Wrapping

- Weighing range — Please refer to the "Weighing" section
- Package size — Width: 130 - 380mm/ 5.1 - 15.0 inches
Depth: 80 - 260mm/ 3.1 - 10.2 inches
Height: 10 - 130mm/ 0.4 - 5.1 inches
The maximum combination of the above dimensions is not available and the available package size depends on the film width.
- Wrapping speed — Max. 30 packages/min.
- Number of film roll — One roll
- Film width — 300 - 500mm/ 11.8 - 19.7 inches
- Film length — Max. 1,500m

Weighing

Interval type	Multi-interval		Single interval
Capacity	Max 6/15kg	Max 3/6kg	Max 30 lb
Scale interval	e=2/5g	e=1/2g	e=0.01 lb
Weighing range	40g - 15kg	20g - 6kg	0.20 - 30 lb
Max. wrapping capacity	5kg	5kg	11 lb

Labelling

- Label type — Thermal paper
- Labelling application — Automatic/manual application
- Label size — *Automatic application:*
Width 40 - 80mm, Length 28 - 100mm
Manual application:
Width 25 - 80mm, Length 20 - 150mm

Console

- Display panel — 10.4 inches TFT color
- Keypad — Pictogram or English
- Programmable items — PLU No., commodity name, ingredient, unit price, price, tare weight, sell-by-date, taste-by-date, department name, barcode (UPC, EAN), target weight, special message, advertising message, shop name & logo, extra print format, wrapping conditions, etc.

General


- Externals — Resin and stainless steel construction
- Power source and — 208 - 240V, 3 phase, 50/60Hz, 1.5KW
- Power consumption — 220 - 240V/ 380 - 415V, 1Ø or 3 Ø/Ø, 50/60Hz, 6A, 1.5kVA
- Net weight — Approx. 280kg/ 617 lb
- Operation humidity — 90%RH(max.)




*Specifications are subject to change without prior notice.

Dimensions


Top View

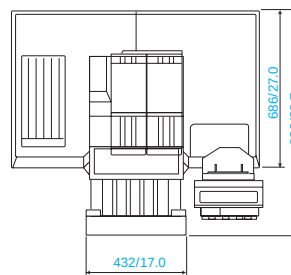

Front View

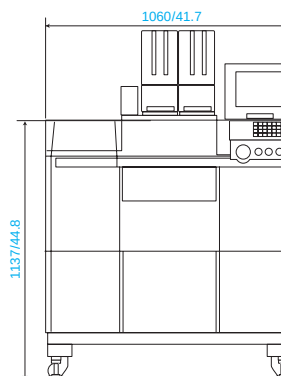

Side View

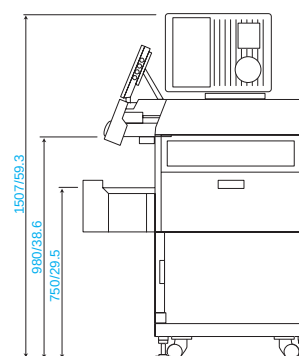

Unit=mm/inches

Model variations

AW-4600CP Auto (Automatic label application)	Single Labeller Type Twin Labeller Type
AW-4600CP (Manual label application)	Single Labeller Type Twin Labeller Type

TERAKA SEIKO CO., LTD.

5-13-12 Kugahara, Ohta-ku,
Tokyo 146-8580 Japan
TEL:+81-3-3752-0327 FAX:+81-3-3752-5814
http://www.digisystem.com
e-mail:info@hq.digi.co.jp



DIGI P's LTD.