



External Dimensions(mm)


SM-5500B (Bench)

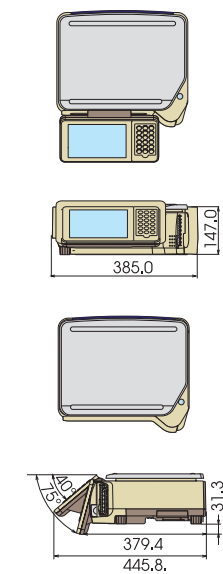


SM-5500P (Pole)

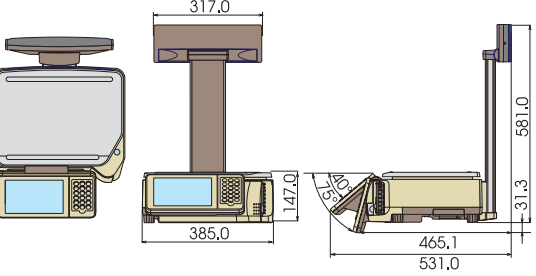


SM-5500EVP (Elevated with 2nd printer)

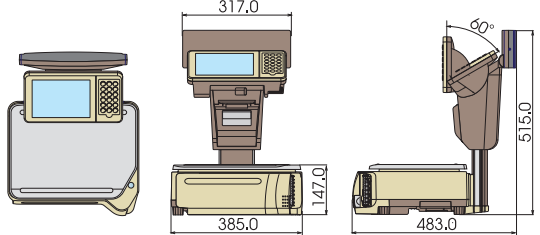

SM-5500EV (Elevated)

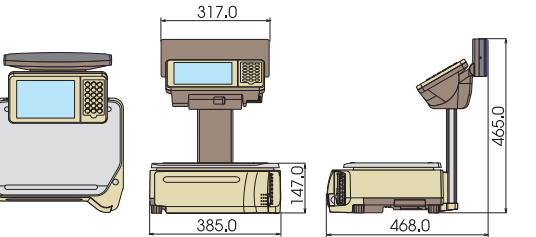

SM-5500EV EL (Elevated Elexy with 2nd printer)

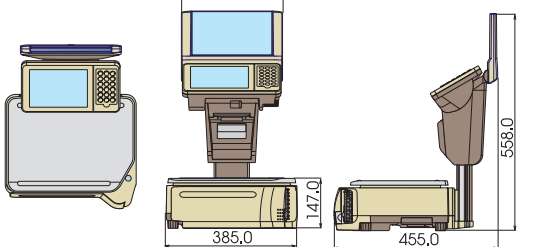

Specifications

Capacity		Max 6kg	Max 15kg / 30lb	Max 30kg
Single Interval	1 / 3,000	e = 2g	e = 5g / 0.01lb	e = 10g
	1 / 6,000 or 1 / 7,500	e = 1g	e = 2g	e = 5g
Multi Interval		Max 3 / 6kg	Max 6 / 15kg	Max 15 / 30kg
	1 / 3,000	e = 1 / 2g	e = 2 / 5g	e = 5 / 10g

Model		SM-5500B (Bench)	SM-5500P (Pole)	SM-5500EV (Elevated)	SM-5500EVP (Elevated with 2nd printer)	SM-5500EV EL (Elevated Elexy)
Dimension (mm)		385.0 (W) x 445.8 Max (D) x 148.1 (H)	385.0 (W) x 531.0 Max (D) x 581.0 (H)	385.0 (W) x 469.9 (D) x 510.8 (H)	385.0 (W) x 480.9 (D) x 540.8 (H)	385.0 (W) x 481.1 (D) x 638.0 (H)
Operator Display	8.4" SVGA (800 x 600)	○	○	○	○	○
Customer Display	3 Colour LED With Backlight (64 x 264)	○	○	○	○	
	Electroluminescent ELEXy					○
Display Resolution		1 / 3,000, 1 / 6,000 & 1 / 7,500				
CPU		iMX31				
Memory		Factory default 256MB / 512MB DDRAM				
		SDHC 2 / 4GB				
Label Size		80mm (W) x 240mm (H) (Max)				
Label / Receipt Roll Diameter		125 mm Max				
Paper Width	Label / Receipt / 2nd Receipt	80mm				
Printing Speed		Up to 150mm/Second*				
Power Source		AC 100 / 110 / 220 / 230 / 240 Volts (50 / 60 Hz)				
Operating Temperature		- 10° C to + 40° C				
Humidity		15% to 85% RH				
Standard Interface		RS232C, Ethernet 10 / 100 Base T, PS2 Keyboard, USB V2.0, OTG				
Net Weight		12.0kg	14.3kg	15.35kg	16.85kg	17.05kg

Options Wireless LAN (IEEE 802.11b / g),Scanner (In Built), Card Reader, 2nd Receipt Printer, 12.1' External Display,Linerless Receipt Printer

* To achieve maximum print speed, high sensitivity thermal paper is necessary. Contact DIGI for details.



Specifications are subject to change without prior notice
Meet or exceed OIML Class III requirements.



SM-5500

PC Based System Scale Printer

Breaking New Grounds With Salient Features



SM-5500EV

TERAOKA WEIGH-SYSTEM PTE LTD.

4,Leng Kee Road, #05-02/03/04/05&11
SIS Building SINGAPORE 159088
TEL: +65-6472-2996
SALES: +65-6378-5387
FAX: +65-6863-4614
E-MAIL: bdd@teraoka.com.sg
WEBSITE:http://www.teraoka.com.sg

TERAOKA SEIKO CO.,LTD.

13-12 Kugahara 5-chome,
Ohta-ku, Tokyo 146-8580, JAPAN
TEL: +81-3-3752-2131
FAX: +81-3-3752-2801
E-MAIL: info@hq.digi.co.jp
WEBSITE:http://www.digisystem.com

Sophisticated Design & Features For A Touch Of Elegance At Your Store

SM-5500

Increase Sales At Point Of Purchase

Additional information such as nutrition, origin, useful tips and recommended recipes can automatically be prompted to counter staff at the point of purchase to up sell or cross sell whenever the opportunity arises.



Recipe

Reduce Training Cost With e-Training

Product information, counter layout, cleaning procedure, hygiene and equipment manual can be displayed on demand for staff training.



e-Training

Removable Key Pad For Easy Cleaning

Maintain high hygiene standard with the water resistant number key pad that is easily removed for cleaning.



Water Resistant Key Pad

Adjustable Operator Display

The operator display is readily adjustable to suit different counter and operator height for the best viewing and operation position.



Adjustable Operator Display

Built-In Scanner

Workspace is minimized as the SM-5500 comes with optional scanner that is ergonomically built in the scale.



Built-In Scanner

Hi-Touch Improves Counter Productivity

A touch at the Hi-Touch tag placed next to each product item shows up on the scale instantly. With 3 simple steps, even new staff can easily operate the scale with minimal effort and training.



Press HI-Touch tag after customer had selected their product.



Only selected product PLUs are displayed on the screen for selection.



Transaction is completed when the label is printed.

3-step Hi-Touch operation to improve counter efficiency.

Multi-Media Possibilities


Up sell or cross sell with the multi-media functionality by simply interfacing with a remote display.



Remote Display


On Demand Printing

Product related information such as recipes or coupons can readily be printed on demand from the optional TVP-1500Q printer.

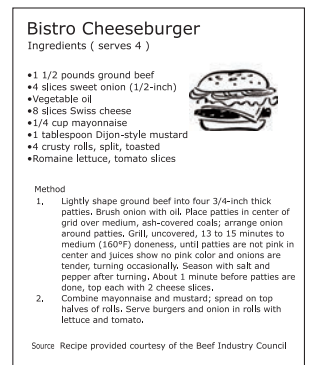

e.LABEL Jr. Ensures Accurate Pricing

Database updates at the server are automatically sent to the e.LABEL Jr. tags, ensuring that pricing is in sync with the checkouts at all times.

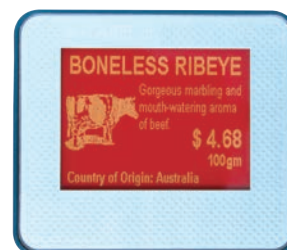

Red



Blue



Black

Eye-Catching Large LCD Customer Display

Choice of red, blue or purple colour can be made to depict different messages. Scrolling advertising message and graphics further enhance sales effort when the scale is not in use.



Red



Purple




Blue

Higher Sales Turnover With Integrated Queue Management

SM-5500 integrated queue management provides customers with the convenience to continue shopping while waiting for their turn to be called, effectively reducing walk-aways and increasing sales.

- Queue number
- Average waiting time
- Number of customers ahead of the queue number



TVP-1500Q Printer

Fast Printing Improves Operation Speed

The label & receipt printer are built for high speed printing at up to 150mm / sec., improving throughput at the serving counter.

2nd Receipt Printer With Auto Cutter

The receipt printer has enhanced auto cutter feature that further improve work speed at the counter.

More features....

ECR functions, remote diagnostics, printing graphics on label & receipt, linerless printing and help mode for operators.

* Check with your DIGI distributor for details