



SM-6000 AI

AI - Powered Smart Recognition Scale



Searching for a New Balance



Rapid Identification
High Accuracy
Easy Deployment

SM-6000 AI's built-in Edge computing AI module helps retailers harness the power of enterprise-grade cognitive intelligence, enabling rapid and accurate product identification for a seamless self-weighing experience.

Benefits

- Integrated AI module with camera for swift deployment
- Optimised image processing with Edge computing
- Simple self-weighing with minimal touchpoints
- Reduces mis-selection and shrinkage
- Consistent performance on different eco grocery bags
- Built-in LED ensures optimal detection even in low light conditions
- Integrable with DIGI's Contactless Self-Weighing and Bring Your Own solutions for a smart, safe and sustainable self-service experience.

3 Simple Steps



01 WEIGH

Place item onto the scale platter



02 SELECT

AI generates best-matched results for easy PLU selection




03 PRINT / SCAN

Print label and paste onto the bag. Alternatively, scan QR code on screen.



• Specifications are subject to change without prior notice
• Meet or exceed OIML Class III requirements

External Dimensions (mm)

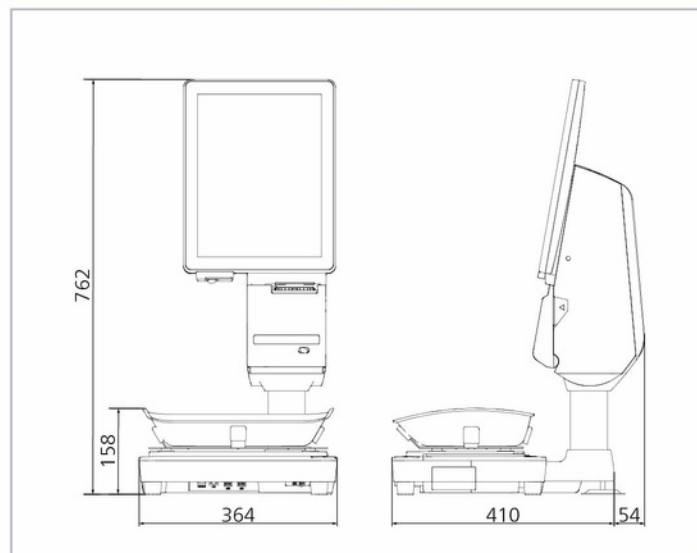

Specifications

Capacity	Resolution	Max 6kg	Max 15kg / 30lb	Max 30kg
Single Interval	1 / 3,000	e = 2g	e = 5g / 0.01lb	e = 10g
	1 / 6,000	e = 1g	—	e = 5g
	1 / 7,500	—	e = 2g	—
Capacity	Resolution	Max 3 / 6kg	Max 6 / 15kg	Max 15 / 30kg
Multi Interval	1 / 3,000	e = 1 / 2g	e = 2 / 5g	e = 5 / 10g

Model	SM-6000 AI
Dimension WxDxH(mm)	364 x 464 x 762
Operator Display	15 " TFT XGA with Capacitive Touch (768 x 1024)
Camera	480p in resolution with built-in LED
Label / Receipt	Types
	Roll Diameter
	Roll Width
	Print Width
	Printing Speed
	Print Resolution
Power Source	Compliance to 80PLUS Power Saving**
Operating Temperature	-10°C to +40°C
Humidity	15% to 85% RH Non-Condensation
Standard Interface	Ethernet 10 / 100 Base T, 4 x USB 2.0, RJ11
Net Weight	16.7 kg

Options	Wireless LAN IEEE 802.11 a / b / g / n / ac, InfoTag, e.Label with Hi-Touch, Base Station, Speed ID, BYO***, Contactless
Factory Option	Auto Tilt Sensor



- * To achieve maximum print speed, high sensitivity thermal paper is necessary.
** 100-120Vac Gold (North America, Canada and Japan)
210-240Vac Silver (European, UK and most of Asia)
*** Plastic platter required.

TERAOKA SOUTH AFRICA (PTY) LTD
Unit 6, City Deep Industrial Park,
Fortune Street, City Deep,
Johannesburg, 2049
TEL : +27 11 613 4291
EMAIL : info@teraoka.co.za
URL: www.teraoka.co.za

TERAOKA SEIKO Co., Ltd.
13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580, JAPAN
TEL: +81-3-3752-2131
FAX: +81-3-3752-5562
URL: www.digisystem.com

