



HI-700L II

Long Scale Dynamic Weigh Price Labeller

Precision labelling of packs up to 605mm at up to 60ppm



Specifications

Key features

- Automatic weigh price labelling system
- Up to 605mm product length
- Direct drive conveyor system
- Fine grain finish Grade 304L stainless steel construction
- Top and base labelling
- Quick connect labeller system
- 15" touchscreen display
- Multiple labeller connection

Performance

Product Size L80-605mm x W40-250mm x H180mm
 Scale Length 780mm
 Max Capacity Up to 12kg/2g
 Pack Speed Up to 60ppm*
 Weighing Modes ... Catch Weigh, Fixed Weight/Price, Average (E-mark)
 Labelling Multiple labellers/printers

Requirements & Peripherals

Power Supply 220-240V(115V Option) 50/60Hz AC Single Phase
 Environment 0 to +30°C (32-86°F)
 Communication Ethernet, USB, RS232
 Air Supply 4-6 bar (50-300lts/min) for connected labeller

Operational Console

Display 15" Colour TFT LCD sealed resistive touchscreen
 Software WorldView (embedded application)
 Operating System .. Windows 10 OS
 Language Multi-lingual Unicode
 Label Design Professor Label (built in application)
 Database SQL
 Connectivity Remote programming and control
 Connectivity to meet industry standards
 Customisable output data
 Interconnectivity to back-office data management

Standard Features


Scale Cover 'Lift-off' formed polycarbonate
 Sensors Overhead Retro Reflective
 Horizontal Retro Reflective (option)
 Labellers Signature
 Base labeller
 Pre-printed label applicator (option)
 Direct protocol Honeywell (PM43/45) (option)
 Direct protocol Zebra (ZPL II) (option)
 Windows printers (option)
 Pack Guides S100 tall guides
 Conveyor Options .. Split blue belts
 Salami belts (option)
 Gravity infeed/outfeed rollers (option)
 Screen 15" XGA a-Si TFT LCD resistive touch
 Other High level warning beacon (option)
 Rejector (option)
 Auto labeller height adjustment via PLU (option)
 3rd Party Interface ... Sleviers (option)
 Barcode scanners/controllers (option)
 Base label detection (option)
 Metal detection (option)
 Compatible with wrappers

* Throughput dependant on product weight and size and scale length.


Dimensions (in mm)

HI-700L II


Top view

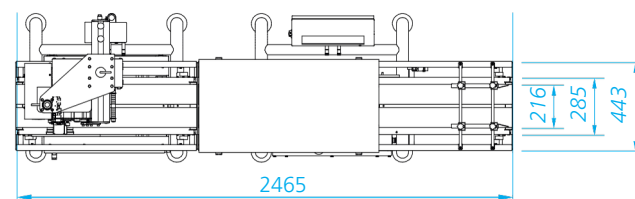

Front view

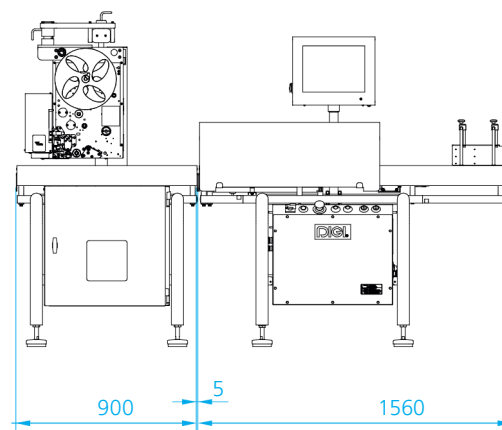

Side view

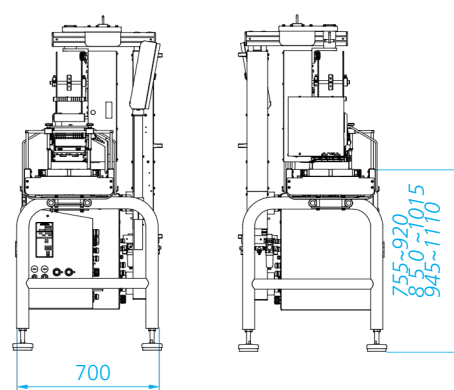

TERAOKA SOUTH AFRICA (PTY) LTD

Unit 6, City Deep Industrial Park,
 Fortune Street, City Deep,
 Johannesburg, 2049
 TEL : +27 11 613 4291
 EMAIL : info@teraoka.co.za
 URL : www.teraoka.co.za

DISCLAIMER: The information contained in this brochure is provided for general informational purposes and is believed to be accurate at the time of publication. Teraoka South Africa (Pty) Ltd accepts no liability, to the extent permitted by South African law, for any loss or damage arising from reliance on information contained herein. Product specifications, features and availability are subject to change without prior notice. Nothing in this disclaimer excludes or limits any rights or obligations that cannot lawfully be excluded under applicable South African legislation, including the Consumer Protection Act 68 of 2008.

For the latest product, technical or commercial information, please contact Teraoka South Africa.



View the website page