


Cassette Labeller

Automatic Print and Apply Labeller


Features:

Flexible Labelling: Available as both a top and bottom labeller


Medium Productivity: The Cassette labeller is designed to fulfil the requirements of almost any medium productivity environment.

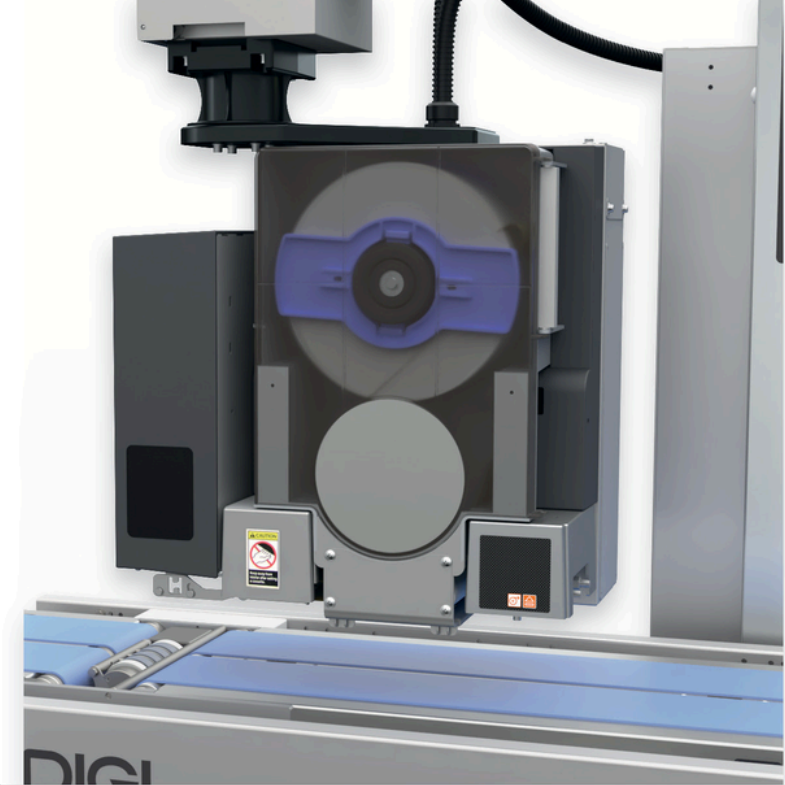


Cassette Labeller Technical Drawings
Front

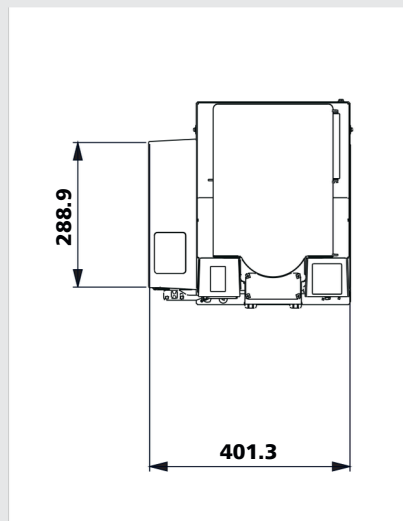

Side

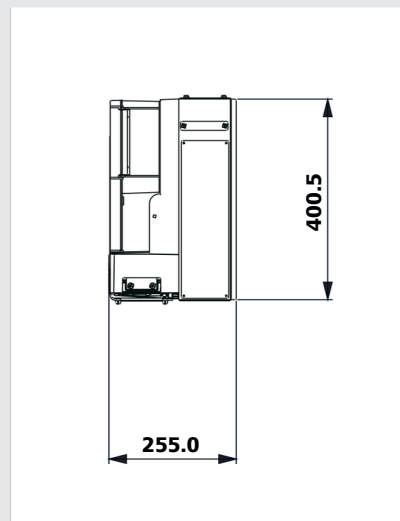

Dimensions in mm

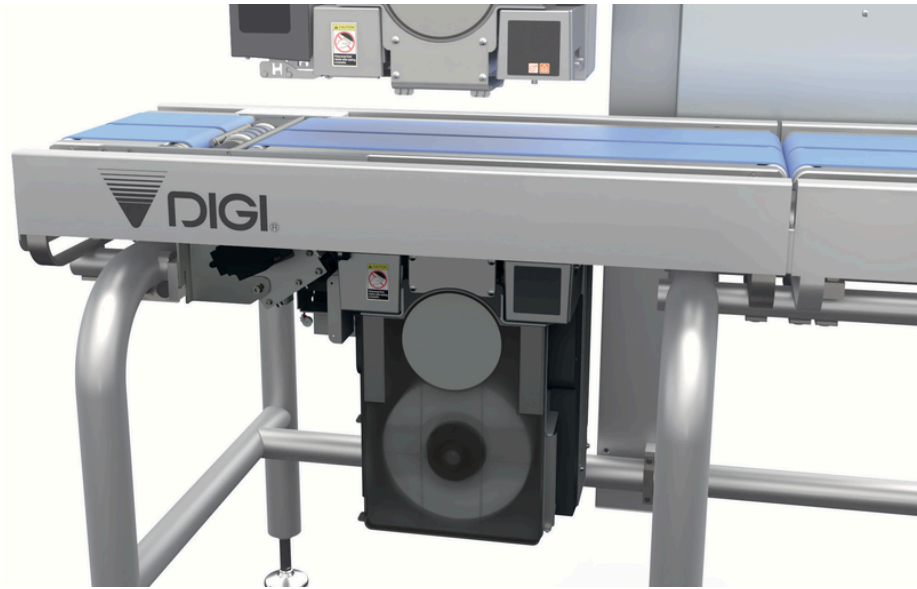

Performance:

Print Speed	Up to
Applicator Options	200mm/sec 11 Finger Touch Base
Printhead Width	80mm
Resolution	300dpi
Print Method	Thermal

Label:

Label Width	40mm-80mm (Base applicator 40mm-80mm)
Label Height	28mm-100mm (Base applicator 28mm-130mm)
Label core	76mm
Label Roll	Inside wound Outside wound
Label Roll Capacity	190mm diameter

Requirements & Peripherals:

Power	Integrated with host unit
Supply Air	4-6 bar 104 ltrs/min at 65ppm (top and base labelling)
Environment	5 to +35°C (32-86°F) non-condensing
Communication	Integrated with host unit

TERAOKA SOUTH AFRICA (PTY) LTD

Unit 6, City Deep Industrial Park,
Fortune Street, City Deep,
Johannesburg, 2049
TEL : +27 11 613 4291
EMAIL : info@teraoka.co.za
URL: www.teraoka.co.za

