


Signature Labeller

Automatic Print and Apply Labeller

Features:

High Speed: The Signature labeller provides fast application at a speed of up to 260mm/sec, large label roll diameter and 300dpi thermal print head



Flexibility: Options are available that will adapt the Signature labeller to best suit individual factory requirements. Choose from a range of label applicators, thermal heads and other auxiliaries

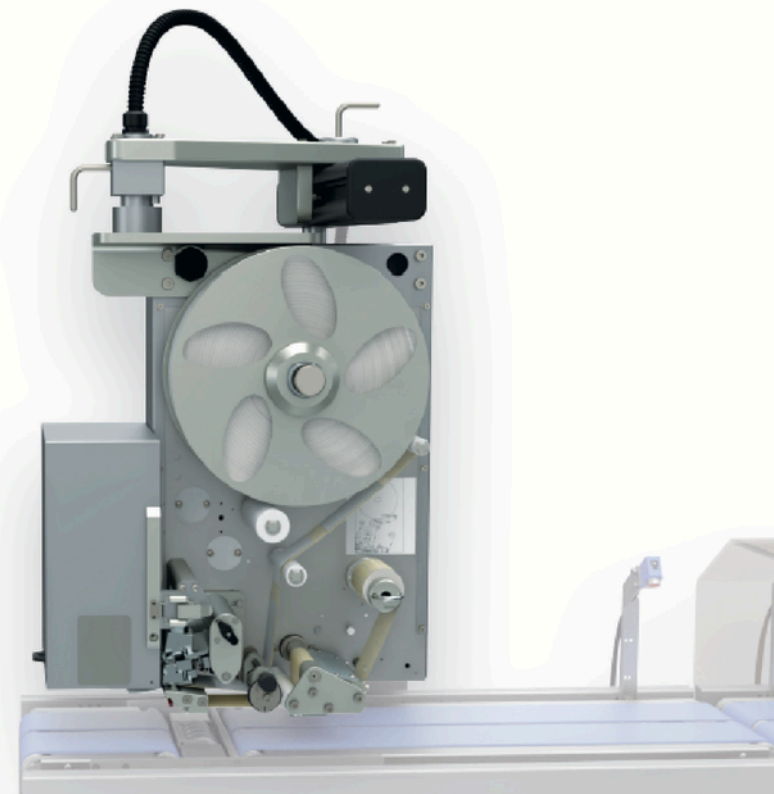

Signature Labeller Technical Drawings (Touch Applicator)

Front



Side

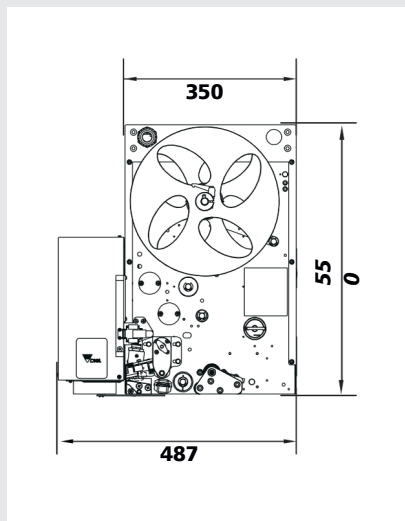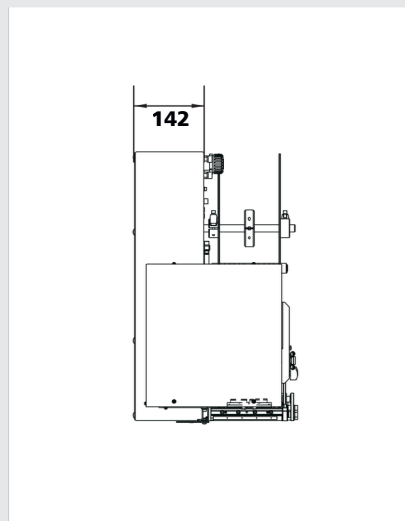

Signature Labeller Technical Drawings (HS Blow Applicator)

Front

Side

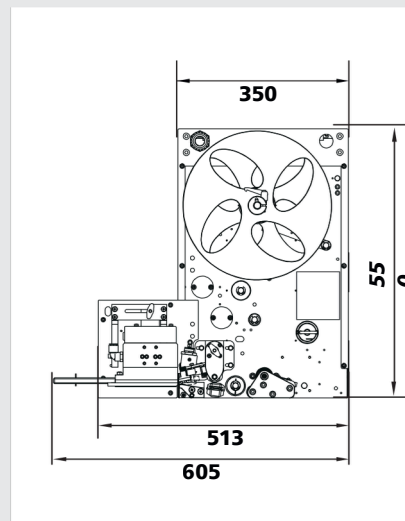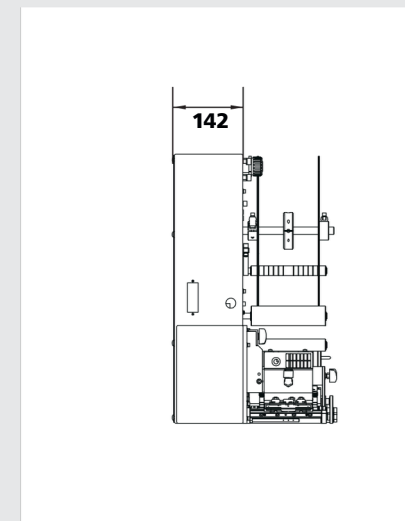


Dimensions in mm



Bottom Applicator

Front Applicator

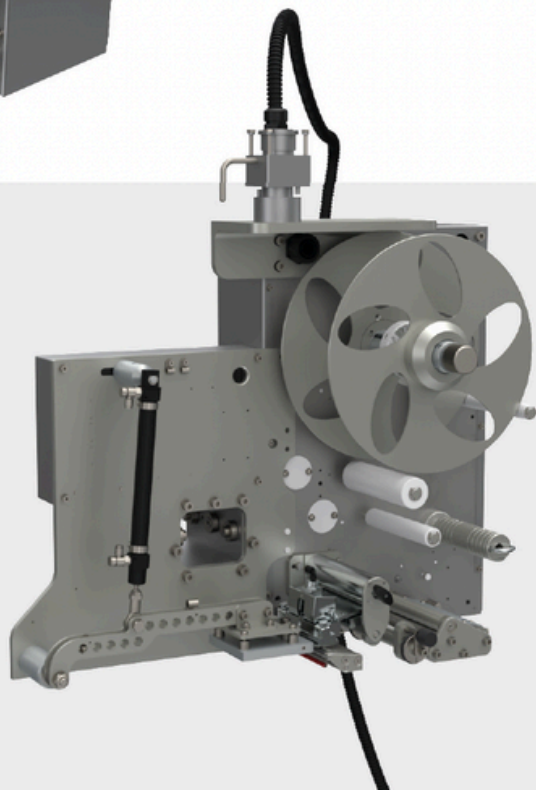

Performance:

Print Speed	Up to 260mm/sec
Applicator Options	HS Blow 9 Finger Touch Base Side Front
Printhead Width	80mm 108mm
Resolution	300dpi
Print Method	Direct/Chemi thermal Thermal transfer (option)

Label:

Label Width	30mm-120mm (Base applicator 40mm-120mm)
Label Height	28mm-150mm (Base applicator 28mm-130mm)
Label core	76mm
Label Roll	Inside wound Outside wound
Label Roll Capacity	300mm diameter

Requirements & Peripherals:

Power Supply	Integrated with host unit
Air	4-6 bar 50-300 ltrs/min
Environment	0 to 30 °C (32-86°F) non-condensing
Communication	Integrated with host unit

Options:

- Label centraliser
- Thermal transfer
- Ultrasonic label gap detection Printer door
- Label code barcode validation

TERAOKA SOUTH AFRICA (PTY) LTD

Unit 6, City Deep Industrial Park,
Fortune Street, City Deep,
Johannesburg, 2049
TEL : +27 11 613 4291
EMAIL : info@teraoka.co.za
URL: www.teraoka.co.za

