



LI-700II

Automatic Dynamic Weigh Price Labeler



Searching for a New Balance

Specifications

Key features

- Automatic Weigh Price Labelling system
- Fixed speed up to 65ppm*
- Compact single frame
- Direct drive conveyor system
- Fine grain finish Grade 304L stainless steel construction
- Top labelling
- Optional base labelling
- Integrated labeller system
- 15" colour touchscreen display
- 2 scale length options
- Multiple labeller connection

Performance

Product Size	
475mm Scale	L80-300mm x W40-250mm x H180mm
660mm Scale	L80-485mm x W40-250mm x H180mm (option)
Capacity	6kg/1g (2g min on 660mm scale)
Pack Speed	10kg/2g
Weighing Modes	Up to 65ppm*
Labelling	Catch Weight, Fixed Weight/Price, Average(Emark)
	Multiple labellers/printers

Requirements & Peripherals

Power Supply	220-240V(115V Option) 50/60Hz AC Single Phase
Air Supply	4-6 bar (50-300 lts/min)
Environment	0°C to +30°C (32-86°F)
Communication	Ethernet, USB, RS232

Operational Console


Display	15" XGA a-Si TFT LCD Resistive touch
Software	WorldView (Embedded Application)
OperatingSystem	Windows 10 OS
Language	Multi-lingual Unicode
Label Design	Professor Label (built in application)
Database	SQL
Connectivity	Remote programming and control
	Connectivity to meet industry standards
	Customisable output data
	Interconnectivity to back-office data management

Standard Features


Scale Length	475mm or 660mm
Scale Cover	'Lift-off' formed Polycarbonate (option)
Sensors	Overhead Retro Reflective
Labellers	Horizontal Retro Reflective (option)
	Signature
	Cassette (option)
	Base labeller
	Direct protocol Honeywell (PM43/45) (option)
	Direct protocol Zebra (ZPL II) (option)
	Windows printers
Pack guides	S100 tall guides
Conveyors	Split blue belts
	Salami belts (option)
	Gravity infeed/outfeed rollers (option)
Other	High level warning beacon (option)
	Rejector (option)
3rd Party Interface	Compatible with sleeves
	Barcode scanners/controllers base (option)
	Label detection (option)
	Metal detection (option)
	SRX Wrapper integration (option)

Dimensions (in mm)


Top view

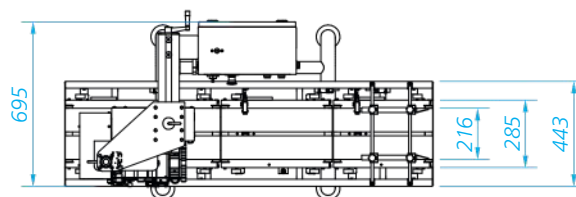

Front view

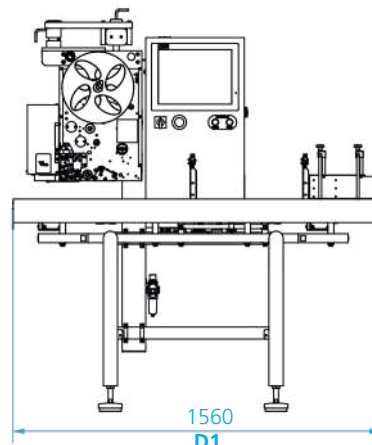

Side view

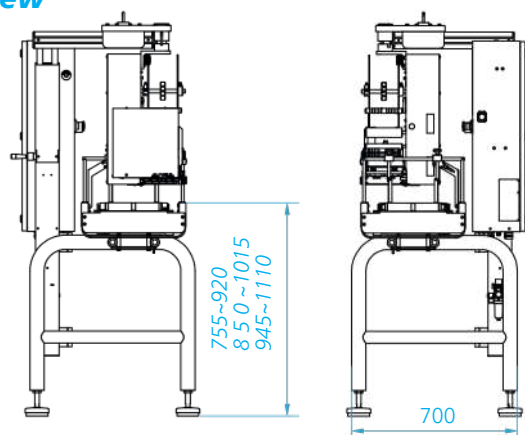

Scale Length	D1
475mm	1560mm
660mm	1980mm



* Throughput dependant on product weight and size and scale length.

LI-700 II top Signature labeller and bottom Cassette labeller

TERAOKA SOUTH AFRICA (PTY) LTD

Unit 6, City Deep Industrial Park,
Fortune Street, City Deep,
Johannesburg, 2049
TEL : +27 11 613 4291
EMAIL : info@teraoka.co.za
URL : www.teraoka.co.za

